

Pipe Insulation



Molded Polystyrene Insulation.

Branch River molded polystyrene insulation is a cost-effective, durable, and energy efficient solution for pipe insulation applications in the service range of temperatures from -100°F to 165°F. Branch River is available in standard and custom cut fabricated profiles to meet your pipe insulation project needs.

Branch River pipe insulation assists with process control, energy conservation, and personal/equipment protection.

- Low k-factors for your insulation needs
- Lightweight with high strength
- No long-term R-value loss or thermal drift
- No CFC, HCFC, HFC, or formaldehyde
- Easy to fabricate
- Superior moisture resistance

Thermal Conductivity.

BRANCH RIVER		100	130	150	200
25°F	Btu·in/°F·ft ² ·h (W/°K·m)	0.23 (0.033)	0.22 (0.032)	0.21 (0.030)	0.20 (0.029)
40°F	Btu·in/°F·ft ² ·h (W/°K·m)	0.24 (0.035)	0.24 (0.034)	0.22 (0.032)	0.21 (0.030)
75°F	Btu·in/°F·ft ² ·h (W/°K·m)	0.26 (0.037)	0.26 (0.037)	0.24 (0.035)	0.23 (0.033)

¹ See Branch River insulation insulation TechData for additional properties.

Proven to meet, or exceed, building codes.

Branch River insulation is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40326-01. Branch River insulation meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".




Sizes and Shapes.

Branch River pipe insulation is provided in standard lengths of 36" with custom lengths up to 72". Branch River insulation thicknesses range from as small as 1/2" up to 12" in double layered applications. Molded polystyrene pipe insulation is provided in two symmetrical half sections with a butt joint standard or an optional tongue and groove joint.

FOAM FACTS:

Branch River Pipe Insulation outperforms other pipe insulations.

- Branch River insulation can easily vary strength, thickness, and size to meet project R-values
- Branch River insulation can easily be fabricated for any pipe size
- Available with butt joints or an optional tongue and groove joint

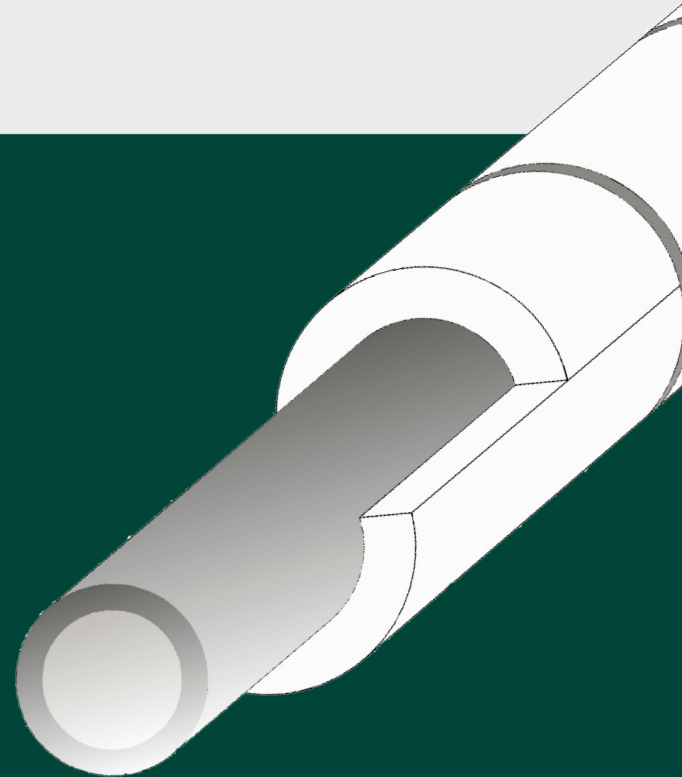

Specifications and Installation Guidelines.

Branch River insulation is well suited for applications involving the insulation of pipelines carrying fluids within the temperature range of -100°F to 165°F. Branch River insulation should be covered to protect against UV exposure.

Low temperature pipelines are susceptible to water vapor condensation on the surface of insulating materials. Water condensation on the surface of all insulations should be avoided. Proper design will prevent premature failures and results of lost insulation efficiency. In order to achieve optimum performance, a vapor barrier or jacketing is always necessary on the outer surface of all low temperature application.

Recyclable.

After it's life as a pipe insulation, Branch River insulation is 100% recyclable. It can be ground into granules and reincorporated into new Branch River insulation products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have Branch River insulation contribute to your next project, just contact your Branch River Plastics, Inc. Technical Sales Representative. They will be happy to give you design consultation, information about Branch River insulation products, pricing, and answers to all of your questions.



PLASTICS, INC.

15 Thurber Boulevard

Smithfield, RI 02917

P: 401-232-3434

www.branchriver.com



Branch River insulation products are manufactured by Branch River Plastics, Inc.

Copyright © 2020 Branch River Plastics, Inc.

UL logo is a registered trademark of UL LLC.

BRPI05-11/20



www.branchriver.com

**MOLDED
POLYSTYRENE
INSULATION**